

FIBRANgyps GLUE

Product


Gypsum-based high density adhesive, in powder to be mixed with water for manual Application, CE marked according to EN 14496.

Application


To be used for fixing plasterboards on walls and coupling plasterboards with insulating materials.

- **Reaction to fire** A₁
- **Application** coupling FIBRANgyps AXps with plot
coupling FIBRANgyps AGeo with stripes and plot
- **Workability time** 90 min.
- **Setting time** 480 min.
- **Preparation** manual
- **Packaging** bags of 25Kg on pallet dry storage no more than nine months

Bags [kg]	Bags/ pallet	Weight/ pallet [kg]
25	50	1250

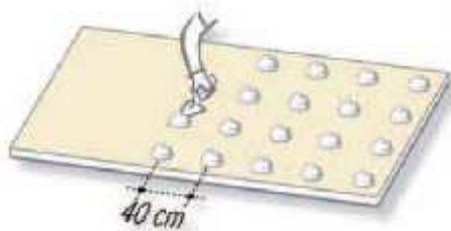

coupling **FIBRANgyps AXps** with plot

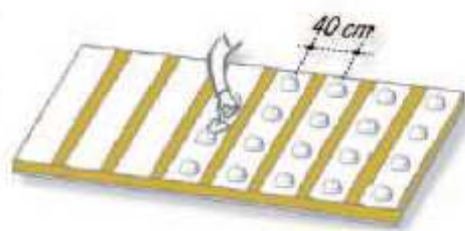

coupling **FIBRANgyps AGeo** with stripes and plot