


# Partition FIBRAN SW 213/75P mw

Partition drywall  $R_w = 62$  dB - thickness 213 mm

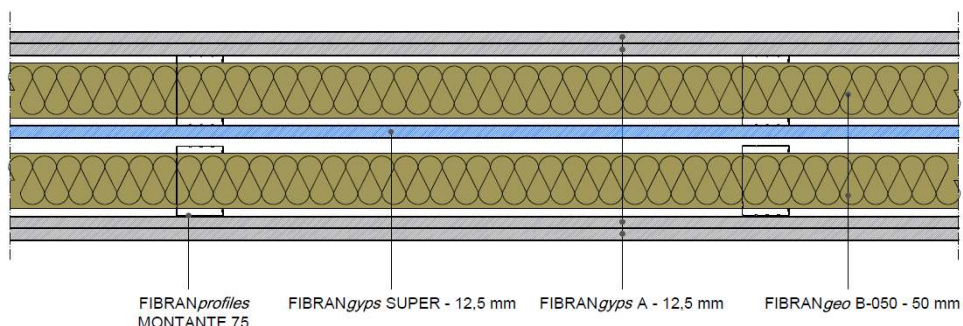

## COMPONENTS

### Plasterboards

2 layers of **FIBRANgypts A** both side, thickness **12,5 mm**, CE marked– **type A** according to EN 520, classified **A+** according to EN ISO 16000-09, fire reaction **A2-s1, d0** according to EN 13501-1, weight 9,2 kg/m<sup>2</sup>, water vapor resistance factor  $\mu=10$ , thermal conductivity  $\lambda=0,25$  W/m K and specific heat  $c_p=1,03$  kJ/kg K according to EN 10456

1 layer in cavity of **FIBRANgypts SUPER**, thickness **12,5 mm**, CE marked– **type D, I, F, H1, R** according to EN 520, classified **A+** according to EN ISO 16000-09, fire reaction **A2-s1,d0** according to EN 13501-1, controlled density more than 1000 kg/m<sup>3</sup>, enhanced surface hardness, improved core adhesion at high temperature, reduced water absorption rate (total <5% ; surface 180 g/m<sup>2</sup>), higher strength (flexural breaking load > 725 N), weight 12,7 kg/m<sup>2</sup>, water vapor resistance factor  $\mu=10$ , thermal conductivity  $\lambda=0,25$  W/m K and specific heat  $c_p=1,03$  kJ/kg K according to EN 10456

### Metal frame thickness 0,6 mm conform to EN 14195

Channels **FIBRANprofiles GUIDA 75** mechanically fixed to the floor and ceiling using fixing nails at a maximum spacing of 500 mm;

Studs (double) **FIBRANprofiles MONTANTE 75**, max axial spacing every 600 mm, slotted to allow passage of the installations

### Insulation board in cavity

**FIBRANgeo B-050**, biosoluble stone wool boards, density **50 kg/m<sup>3</sup>**, thickness **50 mm + 50 mm**, fire reaction A1 according to EN 13501-1, thermal conductivity 10°C  $\lambda_D = 0,034$  W/m K according to EN 12667 and EN 12939, water vapour diffusion resistance factor  $\mu=1$  according to EN 12086, specific heat capacity  $c_p=1,03$  kJ/kg K according to EN 10456

### Screws

Self-drilling screws **FIBRANgypts SCREW 3,5 x 25** and **3,5 x 35 mm** with resistance in salt spray test not less than 72 hours and **FIBRANgypts SCREW 3,9 x 38** fixed max 300 mm each


### Adhesive tape and joint filler

Closed cell polyethylene foam adhesive tape **FIBRANgypts** to be applied on the entire perimeter of the metal structure, to eliminate the possible acoustic bridges due to the transmission of noise through the building structures.

Treatment of the joints between plasterboards and head of screws with **FIBRANgypts JF**, CE marked 3B according to EN 13963, and reinforcing tape **FIBRANgypts TAPE** according to the level quality Q2 (Eurogypsum)

# Partition FIBRAN SW 213/75P mw

## Technical features

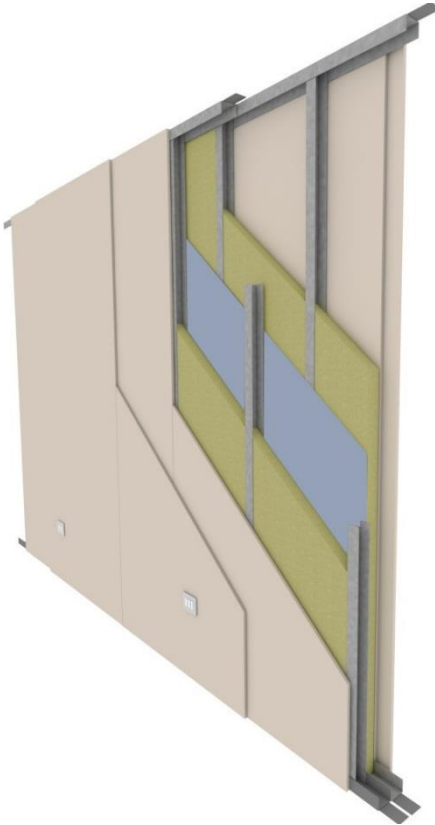

### Acoustics

**R<sub>w</sub> = 62 dB** –test report Istituto Giordano n° 295784

### Thermal Insulation

**U = 0,31 W/m<sup>2</sup>K** – calculated with software

### Mechanical performance

**FIBRANprofiles** channels and studs DIN 75 mm, max axial spacing every 600 mm, thickness 6/10 mm conform to EN 14195.

Profiles must be designed according to local regulation and specific application.

In case of walls longer than 15 meters, an expansion joint must be made every 10 meters or at structural joints

### Finishing


According to quality level required (Eurogypsum). Use FIBRANGyps JF READY MIX for level Q4

### Sustainability


FIBRANGyps plasterboards are classified A+, the best one according to EN ISO 16000-09, with regards to the emission of formaldehyde, acetaldehyde and other substances.

# Partition FIBRAN SW 213/75P mw


## Construction details

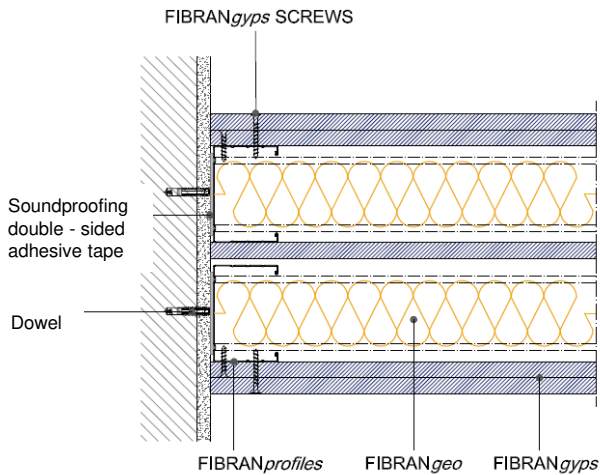


Detail. 1 **WALL CONNECTION**

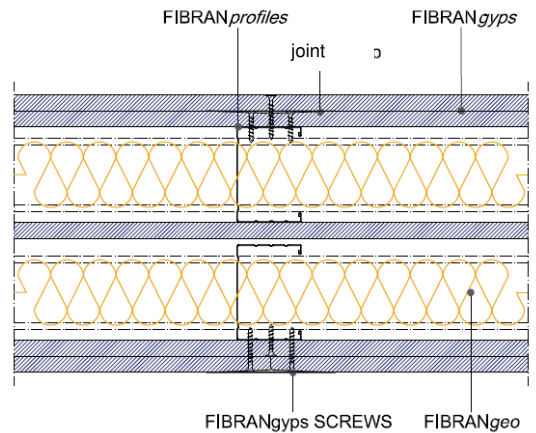

Detail. 2 **JOINT**

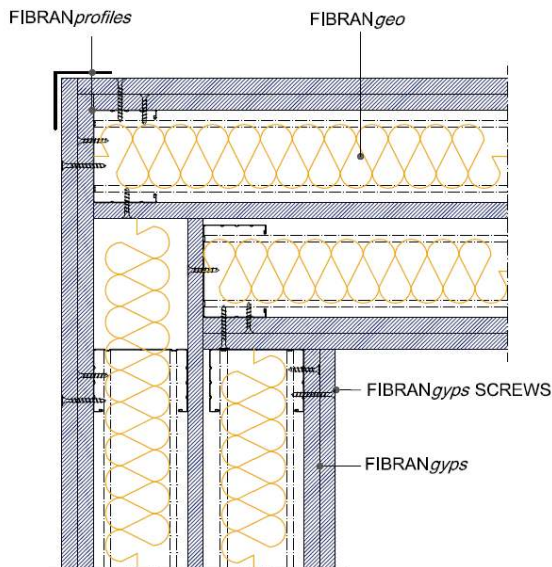


Detail. 3 **CORNER FITTING**

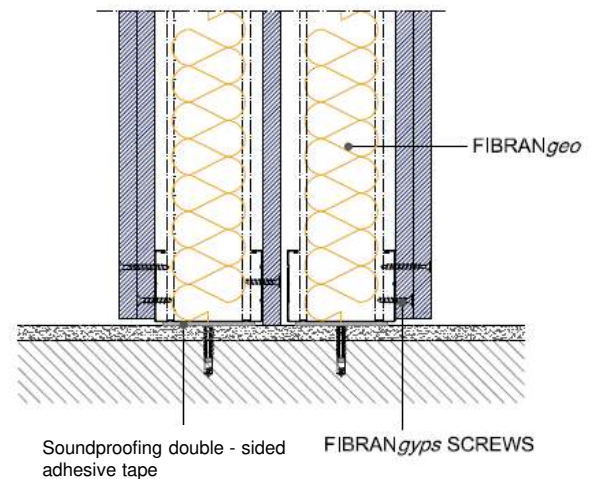


Detail. 4 **FLOOR CONNECTION**

# Partition FIBRAN SW 213/75P mw


## Construction details

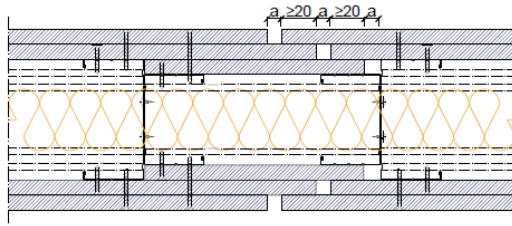

Detail. 5 **EXPANSION JOINT**

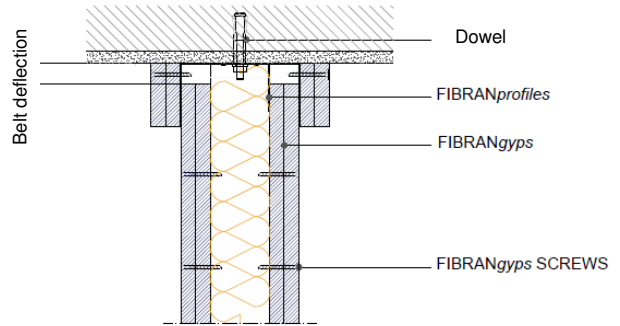

Detail. 6 **DESOLIDARIZZAZIONE FLOOR - WALL**

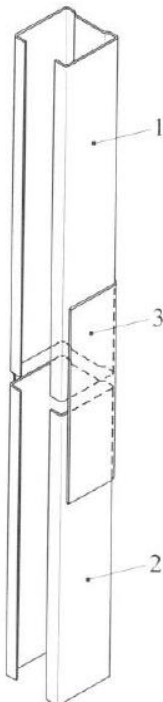

*N.B. Indicative drawings*

**LEGEND**






- 1. stud
- 2. stud
- 3. stiffening element made with a channel of the same width as the stud; lenght at least 10 times the width

Detail. 7 **JOINT BETWEEN PROFILES**

# Partition FIBRAN SW 213/75P mw

## Quantities of material

### Indicative quantities for square meter of partition

		quantity/m <sup>2</sup>		quantity/m <sup>2</sup>	
		centre 600 mm		centre 400 mm	
Description	UM				
FIBRANgy <sup>ps</sup>	m <sup>2</sup>	5,2	5,2	5,2	5,2
FIBRAN <i>profiles</i> studs	m	4	8	5,2	10,4
FIBRAN <i>profiles</i> channels	m	1,4	1,4	1,4	1,4
FIBRANgeo	m <sup>2</sup>	2,1	2,1	2,1	2,1
Joint filler FIBRANgy <sup>ps</sup> JF	kg	0,7	0,7	0,7	0,7
Adhesive tape FIBRAN <i>profiles</i>	m	2	2	2	2
FIBRANgy <sup>ps</sup> TAPE	m	1,67	1,67	1,67	1,67
FIBRANgy <sup>ps</sup> SCREW 25mm	pz	25	25	33	33
FIBRANgy <sup>ps</sup> SCREW 35mm	pz	33	33	40	40