

Description

The boards **FIBRANGEO BP 50** are a natural fibrous material produced by minerals like Basalt, Limestone, Dolomite, and Bauxite. FIBRANGEO boards have dimension stability, are chemical inert, their attributes are maintained constant in time and do not allow the growth of parasites.

Certification

Production according to standard:

- EN 13162
- EN 13172
- EN 13501-1

Notified Bodies:

- Forschungsinstitut für Wärmeschutz e.V. München (FIW)
- Identification Number: 0751

- Materialprüfanstalt für das Bauwesen Hannover (MPA BAU)
- Identification Number: 0764



Technical Characteristics

MW-EN 13162-T7-CS(10)50-TR15-PL(5)550-WS-WL(P)-MU1-SD32-CP2-AW1


Technical Characteristics	Units	EN / DIN	Value
Thermal Conductivity at 10 °C	W/(m*K)	EN 12667	0,039
Fire Classification	Class	EN 13501-1	A1
Usage Temperature	°C	DIN 4102	750
Short Term Water Absorption	kg/m ²	EN 1609	<1
Long Term Water Absorption	kg/m ²	EN 12087	<3
Compression strength at 10% deformation	kPa	EN 826	50
Tensile Strength Perpendicular to faces	kPa	EN 1607	15
Point Load	MPa	EN 12430	550
Dynamic Stiffness	MN/m ³	EN29052	32
Sound Absorption Coefficient		ISO 11654	1

Explanation EN 13162 designation code

- MW – Mineral wool – Stonewool
- EN 13162 – The European Standard number
- Ti – Thickness Tolerances (T4: - 3mm + 5mm)
- CS(Y10) – Compressive strength at 10% deformation (kPa)
- TRi – Tensile strength perpendicular to faces (kPa)
- SD – Dynamic Stiffness (MN/m³)
- PL (5)i – Point Load (N)
- MU_i – Water Vapor Transmission
- WS – Short Term Water Absorption (< 1kg/m²)
- WL(P) – Long Term Water Absorption with partial immersion (< 3kg/m²)
- AW_i - Weighted sound Absorption Coefficient
- AF_i – Air flow resistivity (kPa s/m³)



Sound Absorption

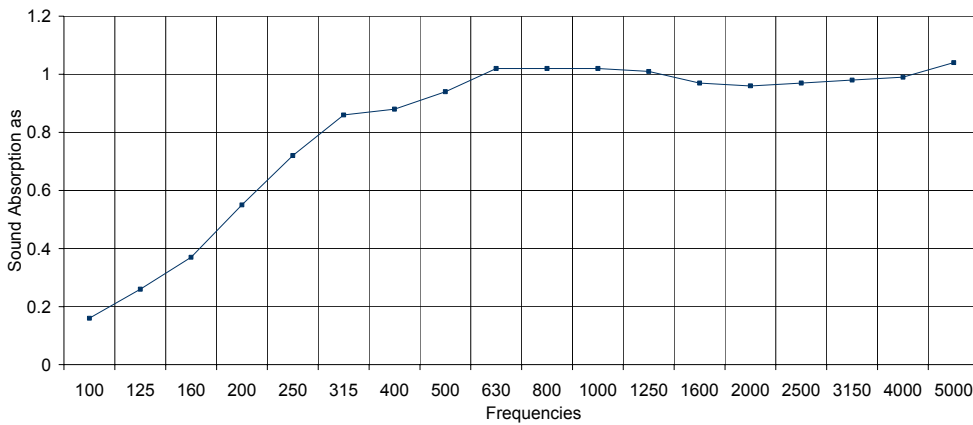

Packaging

thickness [mm]	width [mm]	length [mm]	boards in package [pieces]	quantity in package [m ²]
40	600	1200	6	4,32
50	600	1200	5	3,60
60	600	1200	4	2,88
70	600	1200	3	2,16
80	600	1200	3	2,16
100	600	1200	3	2,16
120	600	1200	3	2,16
140	600	1200	2	1,44
150	600	1200	2	1,44

Instructions for use

HANDLING AND STORAGE

FIBRAN^{GEO} B products should be stored indoors. If stored outdoors, they must be protected from impregnation. Pallets shrink-wrapped weather tightly in PE film may be stored outside. Separate packages should be placed on a flat pallet, not in direct contact with the ground. If part of the product gets wet, it must be dried before installation. Stonewool dries quickly and its insulating properties remain unchanged after drying. FIBRAN^{GEO} B products are chemically inert and do not allow the growth of micro-organisms, insects or rodents. Handling, loading and unloading of the products should be carried out with care, to avoid damage both of the packaging and the boards' edges.

APPLICATION AND PERSONAL PROTECTION

For the selection and application of FIBRAN^{GEO} B products all design requirements should be taken into consideration. FIBRAN^{GEO} B products should be protected from impregnation, prior to and during application. The packaging film should be removed with care just before installation. Working areas should be kept clean. Unnecessary or extensive contact of the skin and eyes with product off-cuts, fibres and dust should be avoided, and protective wear should be used (gloves, goggles, hats). Sufficient ventilation of the working areas should be ensured, whilst power cutting tools should always be provided with a mechanical system of dust intake. Stone wool products are not considered hazardous waste. Waste disposal should be carried out according to State and Local regulations.

FIBRAN reserves the right to alter or amend product specifications without notice. The information included in this publication is correct to the best of our knowledge at the time of printing. Whilst FIBRAN will endeavour to ensure publications are up to date, it is the users' responsibility to check with the company the validity of the information prior to materials use.

DATE.:01/10/2011VERS. 3



Central Office
6^oKm Thessaloniki - Oreokastro
P.O. BOX 40306, ZIP CODE 560 10
Tel. +30 2310 682 425
Fax. +30 2310 683 13

fibran[®]
Web site: www.fibran.gr
e-mail: info@fibran.gr